






S	1/2.5" 8.57MP CMOS
Resolution	Resolution : 4K* / 1080p / 720p Frame Rate : 59.94 / 50 / 29.97 / 25 * 29.97 / 25
Inputs	3G-SDI / HDMI / Ethernet
Zoom	30x
Optical Zoom	12x
Field of View	68°
Field of View (Horizontal)	+170° ~ -170°
Field of View (Vertical)	300°/sec
Field of View (Diagonal)	+90° ~ -30°
Field of View (Diagonal)	300°/sec
Aperture	F1.6 ~ F3.4
Depth of Field	4.6mm ~ 135mm
Shutter Speed	1/1 ~ 1/10,000 sec
White Balance	1.5m (Wide / Tele)
Gain	> 50dB
Low Light Sensitivity	0.1 lux (F1.6, 50IRE, 30fps)
White Balance	Auto / ManuHl
White Balance	Auto / ManuHl
White Balance	Auto / ManuHl
White Balance	Auto / ManuHl
WDR	2x

3D NR	2x
H.264 / H.265	2x
3D NR	256
Video Compression	HEVC 4K 29.97fps H.264 1080p 59.94fps H.264 640x360 29.97fps
Audio Compression	G.711 / AAC
Protocols	RS-232 / RS-422 / Ethernet
Control Protocols	VISCA / PELCO D / ONVIF
Signal Lamp	ui
PoE	PoE+ (IEEE802.3at)
Video Flux	RTSP / RTMP / RTMPS / MPEG-TS / SRT
Video Compression	HEVC / H.264
Audio Input	Line In / MIC In (Phone Jack 3.5mm x1)
Audio Output	Ethernet / SDI / HDMI
IR Pass-Through	2x
IR Receiver	ui
IR Remote Control	ui
DC In	12V +/- 20%
Power	PoE : 18W DC In : 16W
Weight	4.4 lbs (2 kg)
Dimensions	6.9" x 7.5" x 7.3" (174 x 190 x 187 mm)

## I/O CONNECTIONS

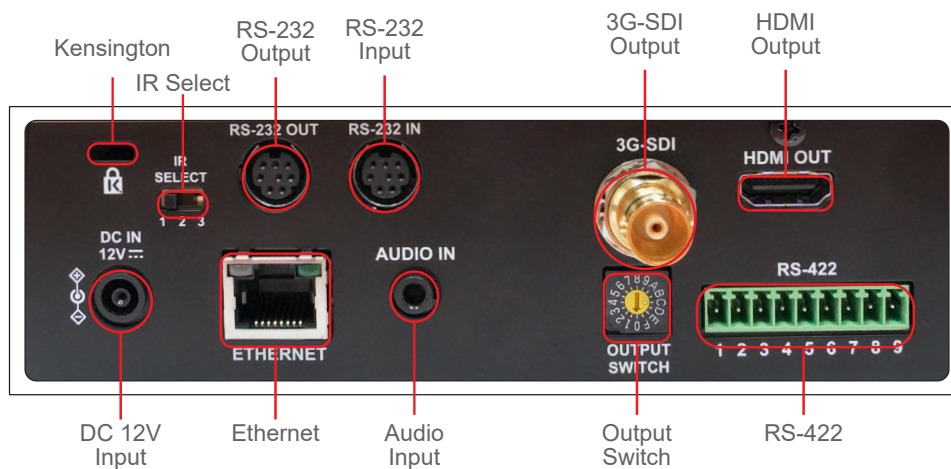

**Lumens**<sup>®</sup>

Your Success, Our Passion!

www.MyLumens.com

Lumens Integration, Inc.  
4116 Clipper Court  
Fremont, CA, 94538  
Phone : +1-866-600-0988  
Fax: +1-510-252-1389

Lumens Europe  
De Nayerstraat 17 9470  
Denderleeuw Belgium  
Phone : +32-473-58-38-95  
Fax: +32-2-452-76-00

